


TAG:

## Architect/Engineering Specifications:

Single hole, single temperature deck mount faucet with polished chrome plated brass body, rigid outlet adapter, 68" flexible stainless steel hose, heat resistant handle, self closing pot filler valve with hook nozzle, compression cartridge with spring check, lever handle, 1/2" NPSM male outlet and wall hook. Certified to ASME A112.18.1 / CSA B125.1, NSF 61-Section 9 and NSF 372.

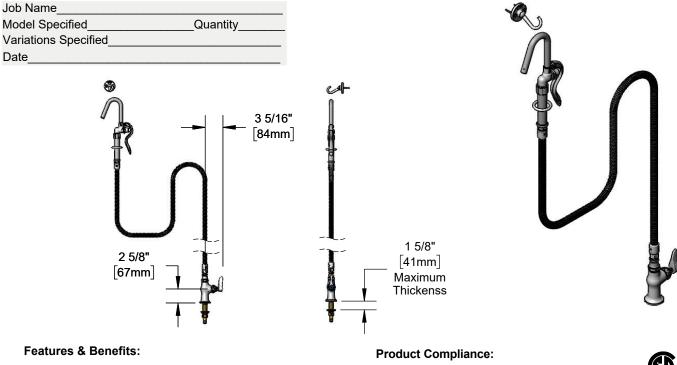

- Single hole, single temperature deck mount faucet w/ polished chrome plated brass body
- Rigid to hose outlet adapter
- 68" flexible stainless steel hose w/ heat resistant gray handle and hold down ring
- Self closing pot filler valve with hook nozzle
- Quarter-turn Eterna compression cartridge w/ spring check
- · Lever handle w/ blue color coded index
- 1/2" NPSM male outlet
- · Wall hook holds spray valve when not in use
- Material: Polished chrome plated brass body and spray valve body, stainless steel hose and chrome plated metal handle.

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- 2019 DOE PRSV Non-Compliant

Warranty: One Year (Limited)

## Performance Data:

- Pressure: 20 125 psi [1.38 8.62 bar]
- Temperature: 40 °F 140 °F [4.44 °C 60 °C]
- Flow Rate: 2.38 GPM [9.01 L/min] @ 60 psi [4.14 bar]

## **Optional Handles**

## Optional Cartridges

□ 4" Wrist Action□ Lever (Standard)□ 4-Arm

Quarter-Turn Cerama w/ Check Valve

Quarter-Turn Eterna w/ Spring Check (Standard)





