| TAG: | |
|------|--|


4" Centerset Single Lever Faucet

Architect/Engineering Specifications:

4" centerset, deck mount lavatory single lever faucet, polished chrome brass body with integral spout, 2.2 GPM aerator, ceramic cartridge with adjustable temperature limit stop, single lever handle, 1/2" NPSM male inlets with coupling nuts and 18" flexible stainless steel supply hoses with 3/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.

Meets ADA ANSI/ICC A117.1 requirements.

| Job Name | |
|----------------------|----------|
| Model Specified | Quantity |
| Variations Specified | |
| Date | |

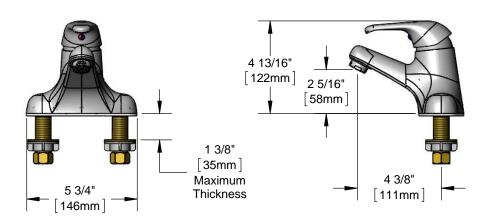



Features & Benefits:

- 4" centerset, deck mount lavatory single lever faucet
- Polished chrome brass body with integral spout
- 2.2 GPM aerator, Series 4 (B-0199-04)
- Single lever handle with color coded index
- Ceramic cartridges with adjustable temperature limit stop
- 1/2" NPSM male inlets with coupling nuts
- 18" flexible stainless steel supply hoses with 3/8" compression connections
- Mounting hardware and deck gasket
- Material: Polished chrome brass body, chrome plated metal handle

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

· Ceramic Cartridge: Two Year (Limited)

Performance Data:

Pressure: 20 - 125 psi
Temperature: 40 °F - 140 °F
Flow Rate: 2.2 GPM @ 60 psi







Optional Outlets (Series 4 / VR Series 9)

| GPM | Aerated | Non-Aerated (Laminar) | VR Aerated | VR Non-Aerated (VR Laminar) |
|------|----------------|-----------------------|----------------|-----------------------------|
| 0.35 | N/A | □ B-0199-04-N035 | N/A | □ B-0199-09-N035 |
| 0.5 | N/A | □ B-0199-04-N05 | N/A | □ B-0199-09-N05 |
| 1.0 | N/A | N/A | N/A | □ B-0199-09-LF-10 |
| 1.5 | □ B-0199-04-WS | N/A | □ B-0199-09-WS | □ B-0199-09-LF-15 |
| 2.2 | Standard | □ B-0199-25 | □ B-0199-09 | □ B-0199-27 |







T&S BRASS AND BRONZE WORKS, INC.

