
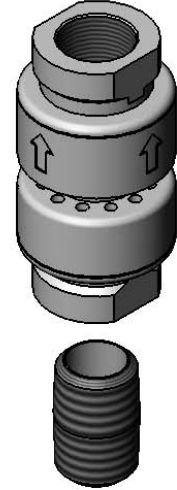
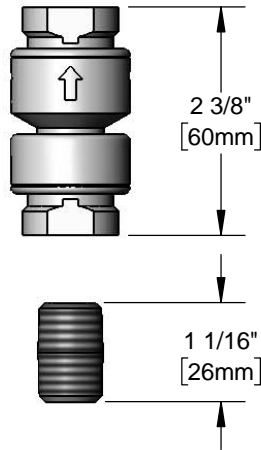


Architect/Engineering Specifications:

In-line continuous pressure dual check vacuum breaker with intermediate vent, polished chrome body, 3/8" NPT female outlet and inlet and 3/8" NPT close nipple. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and CSA B64.8.

Job Name _____
 Model Specified _____ Quantity _____
 Variations Specified _____
 Date _____

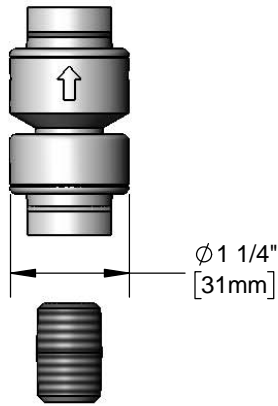

Features & Benefits:

- In-line 3/8" continuous pressure dual check vacuum breaker w/ polished chrome plated body
- 3/8" NPT female Inlet and outlet
- 3/8" NPT close nipple included
- EasyInstall quick installation inlet for standard T&S swivel faucet
- Design prevents back siphonage of contaminated water
- Material: Polished chrome plated brass body and nipple

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- CSA B64.8 (VB)



Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 7.27 GPM @ 60 psi