



Gas Hoses
HG-SD-36



TAG:

SAFETY-LINK Gas Hose

Architect/Engineering Specifications:

36" corrosion protection coated gas stationary appliance connector hose with 3/4" NPT female inlet and outlet. Certified to ANSI Z21.24 / CSA 6.10, NFPA 54 and ANSI Z21.75 / CSA 6.27.

Job Name _____
 Model Specified _____ Quantity _____
 Variations Specified _____
 Date _____

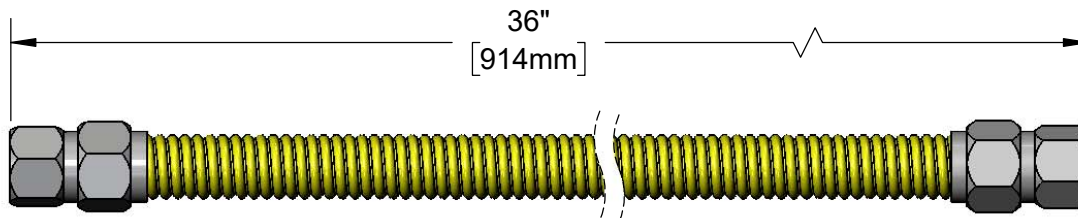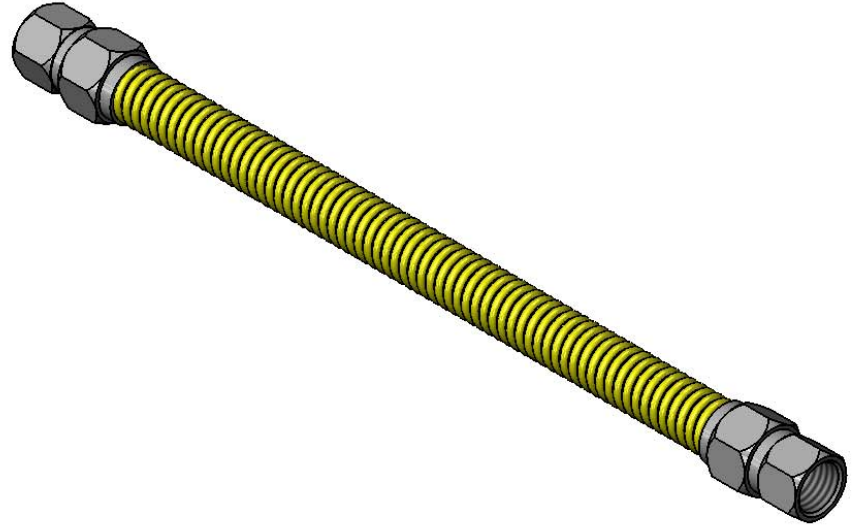

Features & Benefits:

- 36" corrosion protection coated gas stationary appliance connector
- 3/4" NPT female freespin inlet and outlet
- 360° rotatable hex nut rotates completely and freely
- Optimum torsional relief improves safety, increases connector life
- Provides efficient, full gas flow
- Material: Extruded coated stainless steel corrugations

Product Compliance:

- ANSI Z21.24 / CSA 6.10
- NFPA 54
- ANSI Z21.75 / CSA 6.27

Warranty: Five Year (Limited)

Performance Data:

- Gas Pressure: 1/2 psi max
- Temperature: 350 °F max w/ fuseable link thermal shut-off
- Capacity: 255,000 BTU/ hr min



T&S BRASS AND BRONZE WORKS, INC.



• 2 Saddleback Cove • Travelers Rest, SC 29690
 Ph 800-476-4103 • Fax 864-834-3518
 • Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 11/22/17