# Pre-Rinse Accessories

## B-0155-CR-LNEZ


**TAG:**

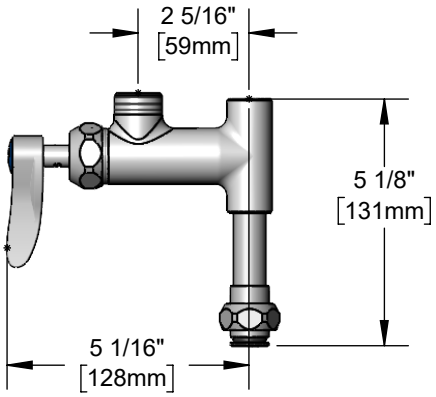
*Add-On Faucet*


**Architect/Engineering Specifications:**

Add-on faucet with polished chrome plated brass body (less nozzle), 3/8” NPT female outlet, ceramic cartridge with check valve, lever handle and quick installation inlet. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

Job Name_____
Model Specified_____Quantity_____
Variations Specified_____
Date_____



**Features & Benefits:**

- Add-On faucet w/ polished chrome plated brass body (less nozzle)
- 3/8” NPT female outlet
- Swivel outlet accepts T&S swing nozzles
- Quarter-turn Cerama cartridge w/ check valve
- Lever handle
- EasyInstall quick installation inlet
- Material: Polished chrome plated brass body, nipple and chrome plated metal handle

**Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

**Warranty:** One Year (Limited)

- Cerama Cartridge: Lifetime (Limited)

**Performance Data:**

- Pressure: 20 - 125 psi [1.38 - 8.62 bar]
- Temperature: 40°F - 140°F [4.44°C - 60°C]
- Flow Rate: 5.35 GPM [20.3 L/min] @ 60 psi [4.14 bar]

(Outlet Device &/or Final Configuration May Reduce Flow Rate)

ADA Compliant

**T&S Swing Nozzles**

☐ 059X 6" Swing Nozzle
☐ 060X 8" Swing Nozzle
☐ 061X 10" Swing Nozzle
☐ 062X 12" Swing Nozzle
☐ 063X 14" Swing Nozzle
☐ 064X 16" Swing Nozzle
☐ 065X 18" Swing Nozzle
☐ 066X 12" Double Joint Swing Nozzle
☐ 067X 15" Double Joint Swing Nozzle
☐ 068X 18" Double Joint Swing Nozzle
☐ 069X 24" Double Joint Swing Nozzle

**Optional Handles**

☐ 4" Wrist Action
☐ Lever (Standard)
☐ 4-Arm

**Optional Cartridges With Checks**

☐ Quarter-Turn Cerama w/ Check Valve (Standard)
☐ Quarter-Turn Eterna w/ Spring Check

**T&S BRASS AND BRONZE WORKS, INC.**
• 2 Saddleback Cove • Travelers Rest, SC 29690
Ph 800-476-4103 • Fax 864-834-3518
• Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 05/05/26