Pre-Rinse Units

S-0113-B8P-LB

TAG:


EasyInstall *Pre-Rinse Unit*


Architect/Engineering Specifications:

Stainless steel 18” riser, pull-down activated valve unit, 1.07 GPM sprayer with insulated grip handle and ball-joint swivel and 6” adjustable wall bracket. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. 2019 DOE PRSV - Class II compliant.

Job Name_____
Model Specified_____Quantity_____
Variations Specified_____
Date_____



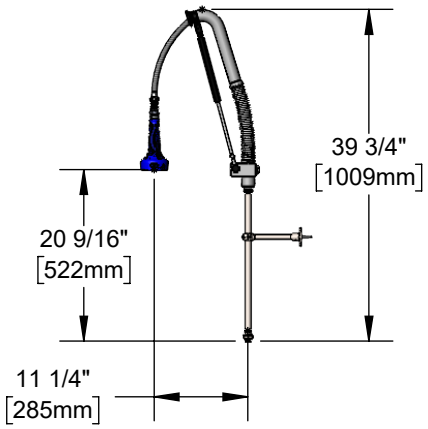

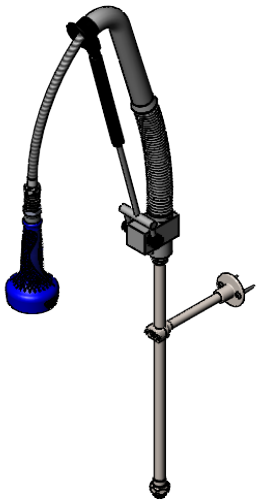

Features & Benefits:

- All stainless steel construction with brushed finish
- Stainless steel 18” EasyInstall riser
- Stainless steel pull-down activated valve unit w/ insulated
  - grip handle blue sprayer
- Stainless steel 1.07 GPM sprayer w/ ss ball-joint swivel
- Stainless steel 6” adjustable wall bracket
- Material: Stainless steel riser, valve body, spring, swivel
  - and handles

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- 2019 DOE PRSV - Class II

Warranty: Lifetime (Limited)

Performance Data:

- Pressure: 20 - 125 psi [1.38 - 8.62 bar]
- Temperature: 40°F - 140°F [4.44°C - 60°C]
- Flow Rate: 1.07 GPM [4.05 L/min] @ 60 psi [4.14 bar]

T&S BRASS AND BRONZE WORKS, INC.
• 2 Saddleback Cove • Travelers Rest, SC 29690
Ph 800-476-4103 • Fax 864-834-3518
• Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 07/10/25