Pre-Rinse Units

S-0133-12CRB8TP


TAG:


EVERSTEEL Easy Install *Pre-Rinse Unit*


Architect/Engineering Specifications:

Stainless steel 8" wall mount mixing faucet with add-on faucet with ceramic cartridge with check valve and lever handles, 12” swing nozzle with stream regulator outlet, 12” rigid riser, accessory fitting tee, pull-down activated valve unit with insulated grip handle, 1.07 GPM sprayer with ball-joint swivel, ceramic cartridges with check valves, lever handles, 1/2" NPT female inlets and 6” adjustable wall bracket. Certified o ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. 2019 DOE PRSV - Class II compliant.

Job Name_____
Model Specified_____Quantity_____
Variations Specified_____
Date_____

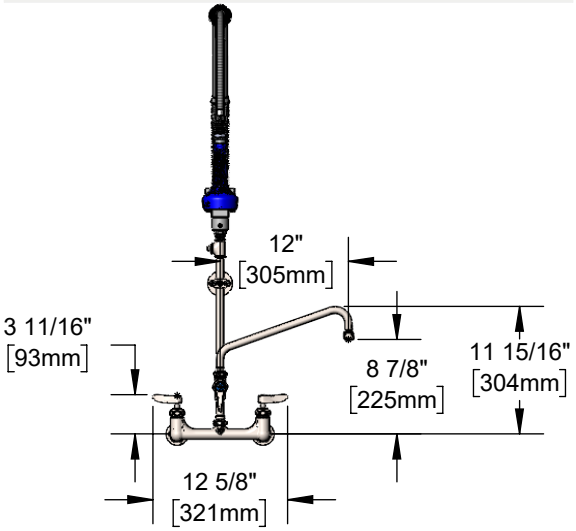

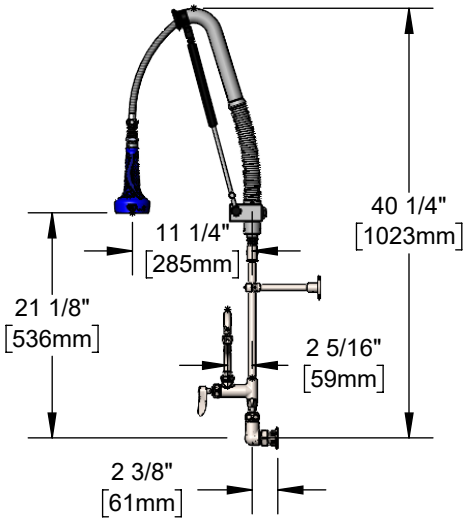

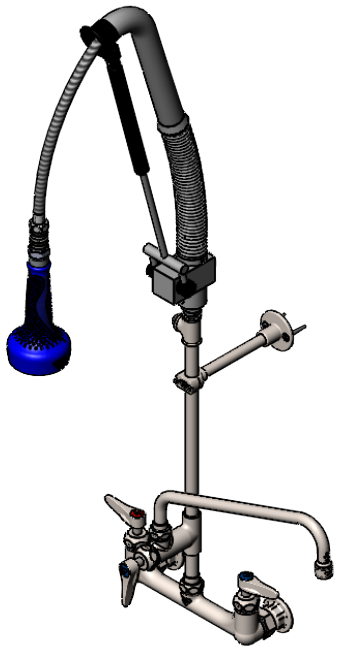

Features & Benefits:

- All stainless steel contruction with brushed finish
- 8" wall mount mixing faucet w/ stainless steel body
- Stainless steel EasyInstall add-on faucet
- Stainless steel 12” swing nozzle w/ stream regulator outlet, Series 1
- Stainless steel 12” rigid riser
- Stainless steel accessory fitting tee
- Stainless steel pull-down activated valve unit w/ insulated grip handle blue sprayer
- Stainless steel 1.07 GPM sprayer w/ ball-joint swivel
- Stainless steel quarter-turn Cerama cartridges w/ check valves to prevent cross flow of water
- Stainless steel lever handles w/ color coded indexes
- Stainless steel 1/2" NPT female eccentric inlets with Ø 2" flanges
- 6” adjustable wall bracket
- Material: Stainless steel body, add-on faucet, riser, stainless steel hose, valve body, spring, swivel and handles

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- 2019 DOE PRSV - Class II

Warranty: Lifetime (Limited)

Performance Data:

- Pressure: 20 - 125 psi [1.38 - 8.62 bar]
- Temperature: 40°F - 140°F [4.44°C - 60°C]
- Flow Rate:
  Spray Valve: 1.07 GPM [4.05 L/min] @ 60 psi [4.14 bar]
  Add-On Faucet: 5.35 GPM [20.25 L/min] @ 60 psi [4.14 bar]

Stainless Steel Optional Outlets (Series 1 / VR Series 6)

GPM	Aerated	VR Aerated (VR Laminar)
1.0	☐ N/A	☐ N/A
1.5	☐ N/A	☐ S-0199-06-F15
2.2	☐ S-0199-01	☐ N/A

Stainless steel Optional Handles

☐ 4" Wrist Action
☐ Lever (Standard)
☐ 4-Arm

Stainless Steel T&S Swing Nozzles

☐ S059X 6" Swing Nozzle
☐ S060X 8" Swing Nozzle
☐ S062X 12" Swing Nozzle (Standard)

Stainless Steel Optional Cartridges With Checks

☐ Quarter-Turn Cerama w/ Check Valve (Standard)
☐ Quarter-Turn Eterna w/ Spring Check

T&S BRASS AND BRONZE WORKS, INC.
• 2 Saddleback Cove • Travelers Rest, SC 29690
Ph 800-476-4103 • Fax 864-834-3518
• Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 07/10/25