



Spray Valve Assemblies

B-0107-C-72H



TAG:

Spray Valve with Hose

Architect/Engineering Specifications:

Self-closing spray valve with 0.65 GPM spray nozzle, polished chrome plated brass body, 72" flexible stainless steel hose, heat resistant handle and 1/2" NPT male inlet. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. EPAAct 2005 compliant.

Job Name	_____
Model Specified	_____ Quantity _____
Variations Specified	_____
Date	_____

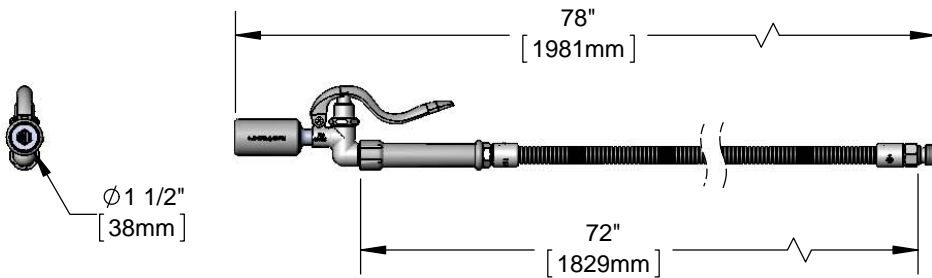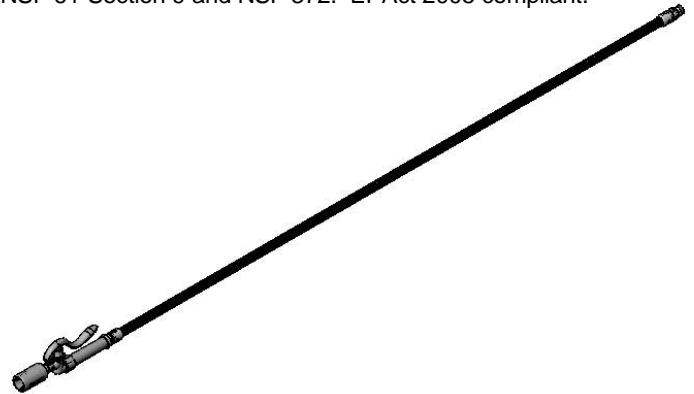

Features & Benefits:

- Self-closing spray valve
- 0.65 GPM spray nozzle
- 72" flexible stainless steel hose w/ heat resistant grey handle and hold down ring
- 1/2" NPT male inlet
- Material: Polished chrome plated brass body, rubber bumper and stainless steel hose

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- EPAAct 2005 (PRSV)
- EPA WaterSense



Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 0.65 GPM @ 60 psi



T&S BRASS AND BRONZE WORKS, INC.



• 2 Saddleback Cove • Travelers Rest, SC 29690
 Ph 800-476-4103 • Fax 864-834-3518
 • Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 05/07/16