




Architect/Engineering Specifications:

Wall mount double pedal valve with 1/2" NPT female angled loose key stop inlets, 3/8" NPT female angled loose key stop volume control outlet, elevated atmospheric vacuum breaker with 3/8" NPT female inlet and outlet, wall hook outlet with 3/8 NPT female inlet, 54" PVC hose with heat resistant handle and extended nozzle. Certified to ASSE 1001.

Job Name _____
Model Specified _____ Quantity _____
Variations Specified _____
Date _____

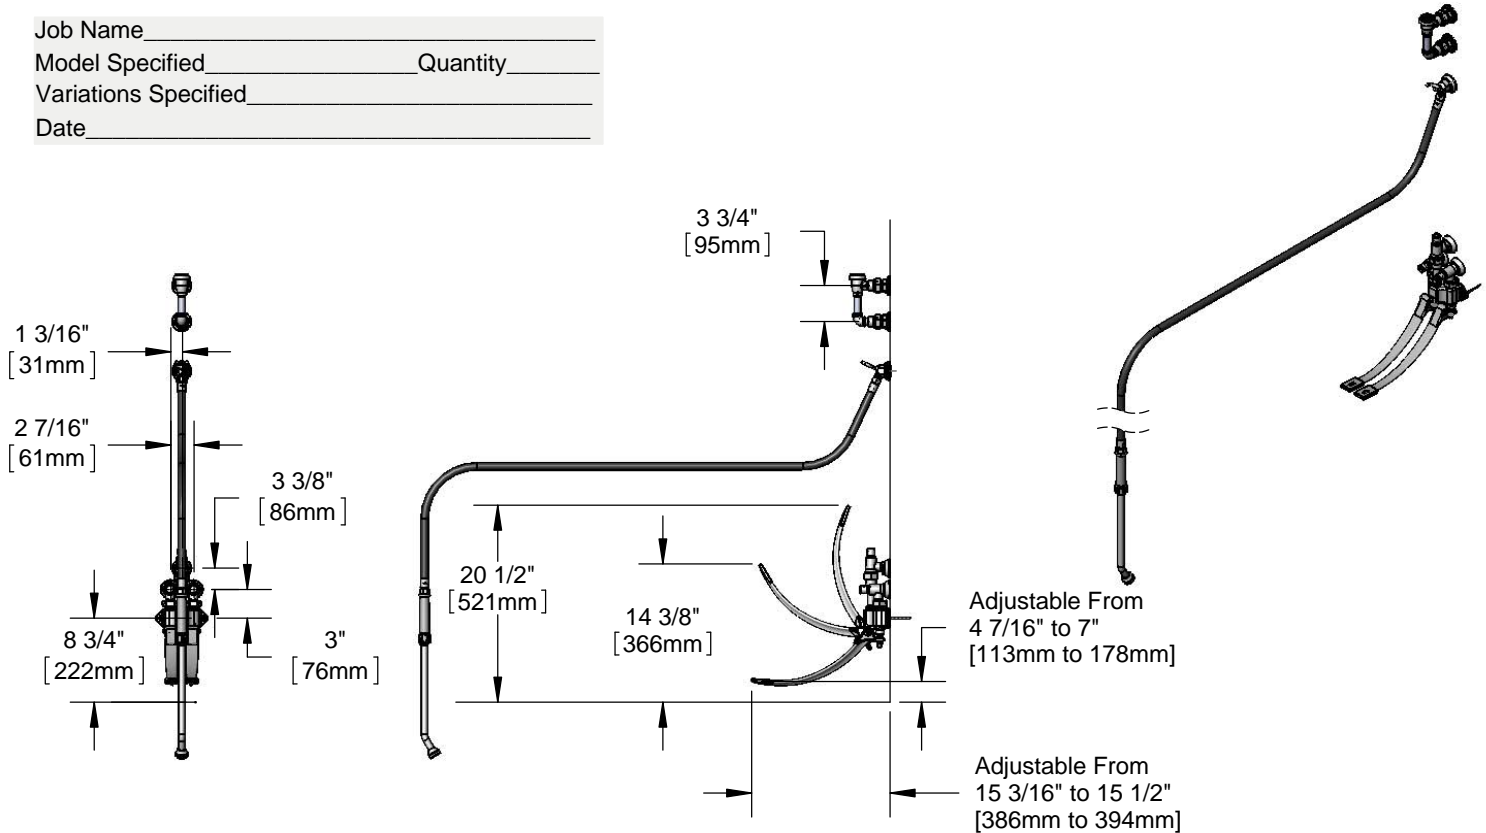

Features & Benefits:

- Wall mount double pedal valve with polished chrome plated brass body
- Pedal valve with 1/2" NPT female angled loose key stops
- Volume control valve with 3/8" NPT female outlet on pedal valve
- Wall hook outlet with 3/8" NPT female inlet
- Elevated vacuum breaker with 3/8" female inlet and outlet
- 54" PVC hose with extended spray nozzle
- Material: Polished chrome plated brass body, loose key stops, vacuum breaker, wall hook outlet & extended nozzle, aluminum pedals and reinforced PVC hose.

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Exempt (Non-Potable)
- ASSE 1001 (VB)

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 4.09 GPM @ 60 psi

