Spray Valve Assemblies

B-0952

TAG:

Spray Valve with Hose

Architect/Engineering Specifications:

1.42 GPM angled spray valve with polished chrome plated brass body, 96” flexible stainless steel hose, heat resistant handle and 1/2” NPT male inlet. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. EPAct 2005 compliant.

Job Name_____
Model Specified_____Quantity_____
Variations Specified_____
Date_____

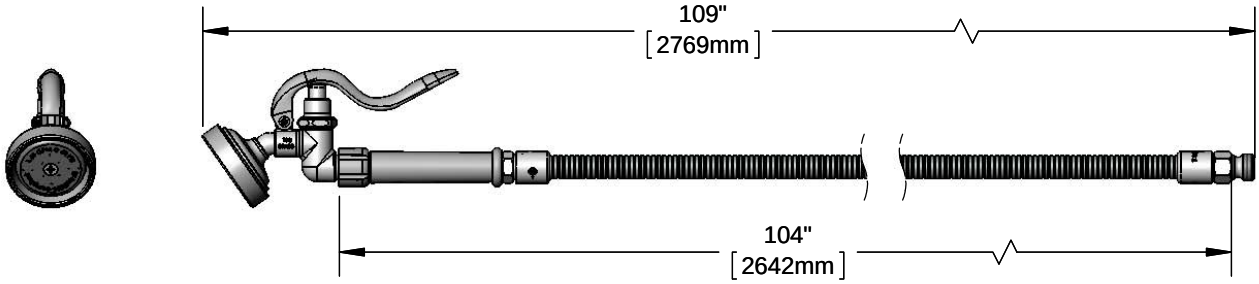

Features & Benefits:

- 1.42 GPM angled spray valve
- 96” flexible stainless steel hose w/ heat resistant gray handle and hold down ring
- 1/2” NPT male inlet
- Material: Polished chrome plated brass body and stainless steel hose

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- EPAct 2005 (PRSV)

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40˚F - 140˚F
- Flow Rate: 1.42 GPM @ 60 psi

T&S BRASS AND BRONZE WORKS, INC.
• 2 Saddleback Cove • Travelers Rest, SC 29690
Ph 800-476-4103 • Fax 864-834-3518
• Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 12/16/16