
Medical and Lavatory Faucets

TAG:

Easy Install Concealed Widespread Lavatory Faucet

Architect/Engineering Specifications:

8" concealed deck mount mixing faucet with forged brass body, polished chrome plated cast spout with 2.2 GPM aerator, metering cartridges, push button caps, polished chrome plated escutcheons, pop up drain with pull rod and 1/2" NPSM male inlets with coupling nuts. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.

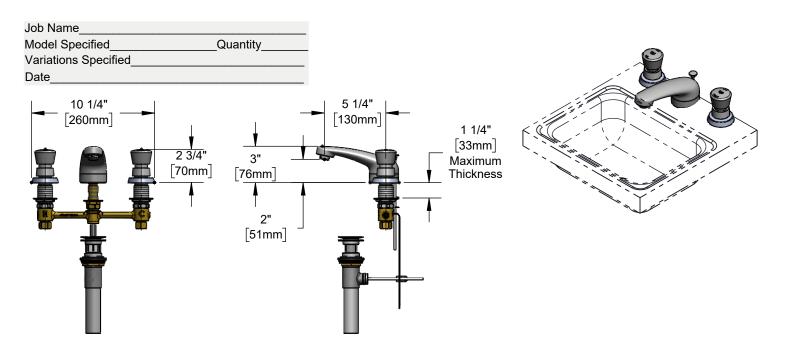

Features & Benefits:

- 8" EasyInstall concealed deck mount mixing faucet w/ forged brass body
- Polished chrome plated brass cast spout
- 2.2 GPM aerator, Series 3 (B-0199-03)
- Metering cartridges
- Push button caps with vandal resistand screws
- Adjustable metering cycle, 10 to 20 seconds
- Pop-up drain w/ pull rod
- Pop-up drain fits sinks with \emptyset 1 7/16" to \emptyset 1 3/4" drain hole
- 1/2" NPSM male inlets w/ coupling nuts
- Material: Forged brass body, chrome plated metal handles, polished chrome plated escutcheons & chrome plated cast brass spout

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)

Warranty: One Year (Limited)



Performance Data:

Pressure: 20 - 125 psi [1.38 - 8.62 bar]

Temperature: 40°F - 140°F [4.44°C - 60°C]

Flow Rate: 2.2 GPM [8.3 L/min] @ 60 psi [4.14 bar]

Optional Outlets (Series 3 / VR Series 8)

GPM		Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)	Optional Cartridges
0.35	N/A	□ B-0199-03-N035	N/A	□ B-0199-08-N035	□ Push Button Metering (Standard)
0.5	N/A	□ B-0199-03-N05	N/A	□ B-0199-08-N05	□ Pivot Action Metering
1.0	N/A	N/A	N/A	□ B-0199-08-LF10	□ Wrist Action Metering
1.5	□ B-0199-03-WS	N/A	□ B-0199-08-WS	□ B-0199-08-LF15	
2.2	Standard	□ B-0199-26	□ B-0199-08	□ B-0199-28	







T&S BRASS AND BRONZE WORKS, INC.



