




**Architect/Engineering Specifications:**

1.07 GPM spray bugle, polished chrome plated brass body and G1/2" BSPP male inlet. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. 2019 DOE PRSV - Class II compliant.

Job Name \_\_\_\_\_  
 Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_  
 Variations Specified \_\_\_\_\_  
 Date \_\_\_\_\_

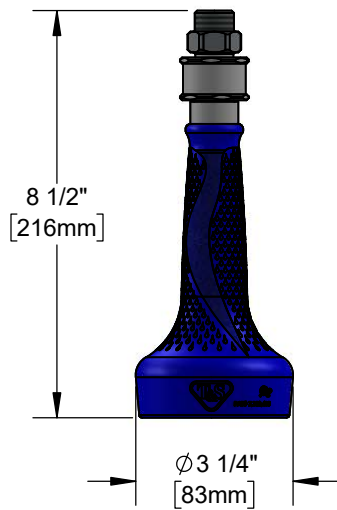

**Features & Benefits:**

- Chrome plated forged brass body
- 1.07 GPM spray bugle
- G1/2" BSPP male inlet
- Heat insulated handle with crush resistant grip
- Material: Polished chrome plated brass body and insulated rubber grip handle

**Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- 2019 DOE PRSV - Class II



**Warranty:** One Year (Limited)

**Performance Data:**

- Pressure: 20 - 125 psi [1.38 - 8.62 bar]
- Temperature: 40 °F - 140 °F [4.44 °C - 60 °C]
- Flow Rate: 1.07 GPM [ 4.05 L/min] @ 60 psi [4.14 bar]

