



# T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088  
Travelers Rest, SC 29690

Model No.

**EC-TMV**

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com



This Space for Architect/Engineer Approval


Job Name \_\_\_\_\_ Date \_\_\_\_\_

Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_



Customer/Wholesaler \_\_\_\_\_

Contractor \_\_\_\_\_

Architect/Engineer \_\_\_\_\_

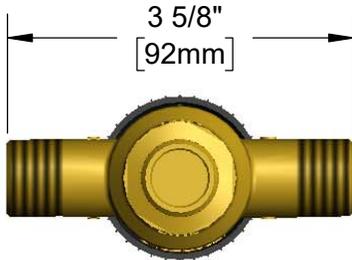

Mixed Water  
to Fixture

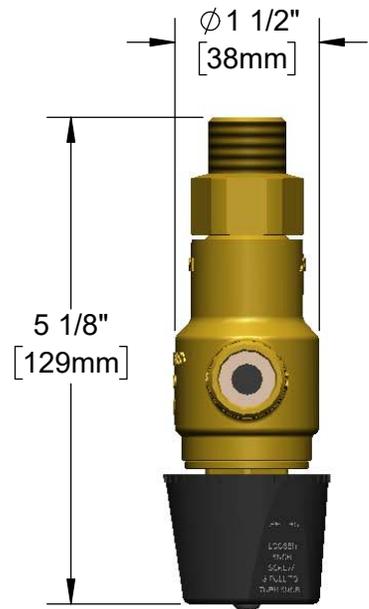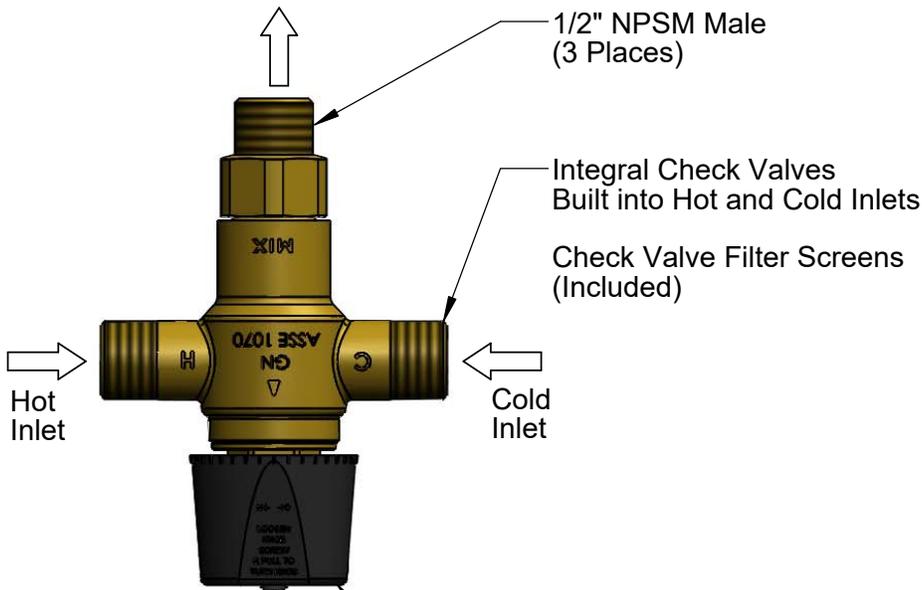

Locking Adjustment Knob Prevents Water from Exceeding Customer's Maximum Temperature Set Point.  
Valve is Factory Pre-set to Deliver Mixed Water Temperature of Approximately 100°F (38°C) Max.

### Performance Rating:

- Minimum Flow Rate: 0.35 GPM
- Pressure Drop at Minimum Flow Rate: 0.5 psi
- Maximum Pressure: 125 psi
- Hot Water Inlet Temperature Range: 120~180°F (49~82°C)
- Outlet Temperature Range: 80~120°F (27~49°C)
- Outlet Temperature Factory Setting: Approx. 100°F (38°C)

Product Specifications:  
Thermostatic Mixing Valve with 1/2" NPSM Male Fittings

Product Compliance:  
NSF 61 - Section 9  
NSF 372 (Low Lead Content)  
ASSE 1070 (TMV)