## T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690

Model No.

016647-45

Item No.

| Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 8  | 64-834-3518 • www.tsbrass.com            |  |
|--|--|--|
|  | This Space for Architect/Engineer        |  |
|  | Model Specified                          |  |
|  | Customer/Wholesaler                      |  |
|  | Contractor                               |  |
|  | Architect/Engineer                       |  |
|  | Architect/Engineer_                      |  |
|  |  |  |
| Water Resistant Faucet Sensor Cable Connection (Remove Rubber Cap to Connect Cable)  1/2" NPSM   | Battery Storage Compartment Access Cover |  |
| Male Outlet— Removable Strainer—   | [27mm]                                   |  |
| Mixed Water Elbow Fitting with Integral Strainer   | 2"<br>[51mm]                             | Operation of States of Sta |
| 1/2" NPSM Female 360° Swivel Coupling Nut  |  | TOTAL CONTRACTOR OF THE CONTRA |
| 3 5/8" x 4 3/16" x 2 1/4" Deep [92mm x 106mm x 57mm] Control Module Box (Gray), AC or DC Operated w/ (4) AA Batteries. Hardwire Capable using Terminals on Back (EC-HARDWIRE Required & Sold | 2" [51mm] 3 7/16" 88mm] ON/OFF But       | tton   |
| Water Resistant Transformer Cable Connection Port (Remove Rubber Plug to Connect Cable)  |  |  |
| Declared Occasional Control  | Draduat Camplianea:                      |  |

Product Specifications:

ChekPoint Sensor Faucet Control Module with Internal Flow Control Setting Switches (Gray Module Housing)

Product Compliance:

UL 1951 NSF 61 - Section 9 NSF 372 (Low Lead Content)

Drawn: DMH Checked: **GEF** Approved: JHB Date: 11/01/18 Scale: 1:2 Sheet: 1 of 2

## TES


## T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690 Model No.

016647-45

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

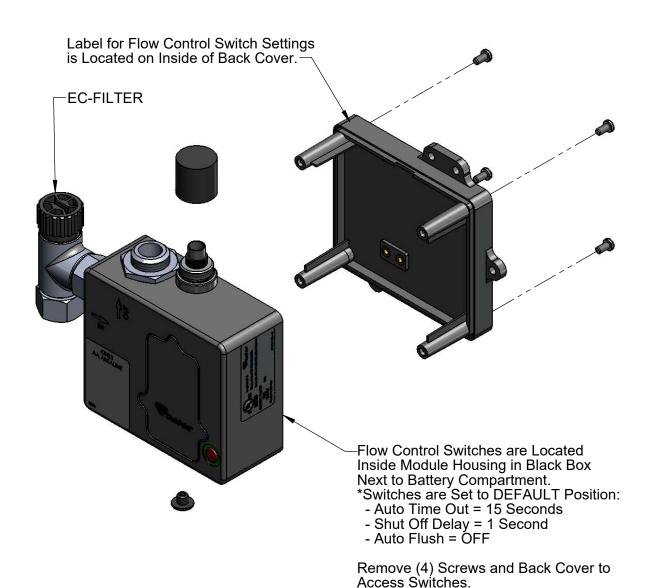

\*Available Water Flow Control Selections:

- Auto Time Out: 15 sec, 30 sec, 45 sec, 60 sec, 3 min, 20 min

- Shut Off Delay: 1 sec, 10 sec, 15 sec, 30 sec

- Auto Flush (30 Seconds After Every 12 Inactive Hours): ON or OFF

**Product Specifications:** 

ChekPoint Sensor Faucet Control Module with Internal Flow Control Setting Switches (Gray Module Housing)

Product Compliance:

UL 1951

NSF 61 - Section 9

NSF 372 (Low Lead Content)

Drawn: DMH Checked: GEF Approved: JHB Date: 11/01/18 Scale: NTS Sheet: 2 of 2